

MEISER®



Layout personalizzati

artos®
Weinbergpfahlsysteme



Znamka ARTOS proizvajalca Meiser nudi idealne rešitve za izgradnjo sodobnih vinogradov in sadovnjakov.

Geometrija, mehanske lastnosti, kakovost materiala uporabljenega pri proizvodnji profilov, so konkreten odgovor na zahteve sodobnega vinarstva /sadjarstva.

Proizvodne linije omogočajo fleksibilnost in hitro izdelavo različnih profilov po izbiri kupca.

Serija ARTOS je razdeljena na 6 osnovnih modelov.

ARTOS vinogradniški stebri so na voljo »pocinkani po obdelavi profila/stebr« ali »pocinkani pred izdelavo profila/stebr« (predhodno cinkanje jeklenega traku)«.

Na voljo so stebri v višini od cm 150 do cm 400.

Neto debeline od mm 1,20 do 2,50

Presek mm 30x26, 30x36, 42x40, 42x50, 42x60, 35x45, 35x50, 35x55, 35x60, 42x65, 57x75, 42x110

Namenski dodatki dopolnjujejo ponudbo stebrov ARTOS (Meiser).

Under the brand name "Artos", Meiser industries offer ideal solutions for the realization of modern vineyards.

The geometry, mechanical characteristics, the quality of the raw material used in the production of profiles are the concrete answer to the needs of modern screw-fruit growing.

The current four product lines allow us to be flexible and fast in both production and customization of profile and hooks.

The selection of Artos products consists of six basic models.

Artos is available in pre-galvanized and individually galvanized poles, c-type, continuously galvanized and colored for a perfect environmental sustainability.

Available heights: from cm 120 to 400 - thickness: from mm 1,20 to 2,50 - sections: mm 30x26, 30x36, 42x40, 42x50,

Available thickness: from mm 1,20 to 2,50 - sections: mm 30x26, 30x36, 42x40, 42x50,

Available sections: mm 30x26, 30x36, 42x40, 42x50, 42x60, 35x45, 35x50, 35x55, 35x60, 42x65, 57x75, 110x65.






JEKLO TIPA S 235 JR - DIN EN 10025 POCINKANO PO OBDELAVI PROFILA DIN EN ISO 1461				
tip	Terroir		PiquetPlus	
mm				
preseki	30 x 26		30 x 36	
mm	1,50	2,00	1,50	2,00
h cm	Kg	Kg	Kg	Kg
130	1,20	1,60		
140	1,29	1,72	1,59	2,13
150	1,39	1,85	1,71	2,28
160	1,48	1,97	1,82	2,43
180	1,66	2,22	2,05	2,73
200		1,46	2,28	3,04

C - TYPE S235 JOW e/o S355 JOW POCINKANO PRED IZDELAVO PROFILA S250GD+ZN275 DIN EN 10346						
tip	Terroir			PiquetPlus		
mm						
preseki	30 x 26			30 x 36		
mm	1,50	1,80	2,00	1,50	1,80	2,00
h cm	Kg	Kg	Kg	Kg	Kg	Kg
130	1,12	1,34	1,49			
140	1,20	1,44	1,60	1,48	1,78	1,98
150	1,29	1,55	1,72	1,59	1,91	2,12
160	1,38	1,65	1,83	1,70	2,03	2,26
180	1,55	1,86	2,06	1,91	2,29	2,54
200		2,06	2,29	2,12	2,54	2,83

Na voljo pocinkano jeklo po izdelavi profila (potopljeno, vroče cinkano) ali predhodno cinkanje jeklenega traku – pred izdelavo profila (c-Type dimenzij mm 1,50 - 1,80 - 2,00)

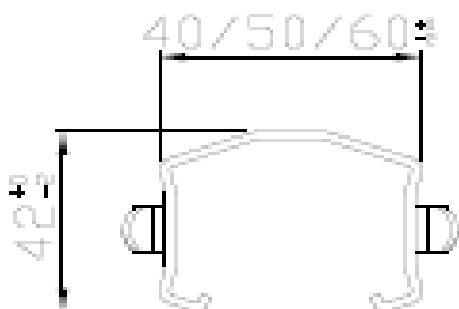


**JEKLO TIP S 235 JR - DIN EN 10025
POCINKANO PO OBDELAVI PROFILA
DIN EN ISO 1461**

tip	C 40		C 50			C 60		
mm	114		124			135		
preseki	40 X 42		50 x 42			60 x 42		
mm	1,50		1,50	1,80	2,00	1,50	1,80	2,00
h cm	kavlji	Kg	Kg	Kg	Kg	Kg	Kg	Kg
180	10	2,60						
190								
200	12	2,89	3,14			3,42		
210	14	3,03	3,30	3,96		3,59		
220	14	3,17	3,45	4,14	4,60	3,76	4,51	5,01
230	14	3,32	3,61	4,33	4,81	3,93	4,72	5,24
240	14		3,77	4,52	5,02	4,10	4,92	5,47
250	14		3,92	4,71	5,23	4,27	5,13	5,70
260	14		4,08	4,90	5,44	4,44	5,33	5,92
270	14		4,24	5,09	5,65	4,61	5,54	6,15
300	14			5,65	6,28		6,15	6,84
325	15						6,66	7,41

**C - TYPE S235 JOW e/o S355 JOW
POCINKANO PRED IZDELAVO PROFILA
S250GD+ZN275 DIN EN 10346**

tipo	C 40		C 50			C 60		
mm	114		124			135		
preseki	40		50x42			60x42		
mm	1,50		1,50	1,80	2,00	1,50	1,80	2,00
h cm	kavlji	kg	kg	kg	kg	kg	kg	
180	10	2,42						
190								
200	12	2,68	2,92	3,50		3,18		
210	14	2,82	3,07	3,68		3,34		
220	14	2,95	3,21	3,85	4,28	3,50	4,20	4,66
230	14	3,09	3,36	4,03	4,48	3,66	4,39	4,87
240	14		3,50	4,21	4,67	3,82	4,58	5,09
250	14		3,65	4,38	4,87	3,97	4,77	5,30
260	14		3,80	4,56	5,06	4,13	4,96	5,51
270	14		3,94	4,73	5,26	4,29	5,15	5,72
300	14				5,84		5,72	6,36
325	14						6,20	6,89

Na voljo pocinkano jeklo po izdelavi profila (potopljeno, vroče cinkano) ali predhodno cinkanje jeklenega traku – pred izdelavo profila (c-Type dimenzij mm 1,50 - 1,80 - 2,00)

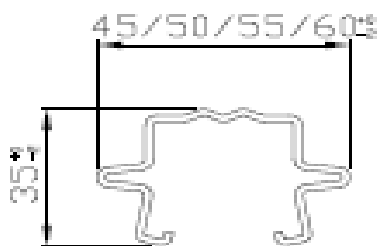



**JEKLO TIP A DD 11 - DIN EN 10111
POCINKANO PO OBDELAVI PROFILA
DIN EN ISO 1461**

	tip	Eco 45	Eco 50	Eco 55	Eco 60
	mm	114	119	124	129
	preseki	45x35	50 x 35	55 x 35	60 x 35
	mm	1,50 + Zn			
h cm	reže	kg	kg	kg	kg
180	12	2,56			
200	12	2,84	2,97		
210	14	2,98	3,12	3,25	
220	14	3,13	3,26	3,40	3,54
230	14		3,41	3,56	3,70
240	14		3,56	3,71	3,86
250	14			3,87	4,02
260	14			4,02	4,18
270	14			4,17	4,34
300	14				4,83

**C - TYPE S235 JOW
POCINKANO PRED IZDELAVO PROFILA
S 250 GD + ZN275 DIN EN 10346**

	tip	Eco 45	Eco 50	Eco 55	Eco 60
	mm	114	129	124	129
	preseki	45x35	50 x 35	55 x 35	60 x 35
	mm	1,50 + Zn			
h cm	reže	kg	kg	kg	kg
180	12	2,38			
200	12	2,64	2,76		
210	14	2,78	2,90	3,02	3,02
220	14	2,91	3,04	3,16	3,16
230	14		3,17	3,31	3,31
240	14		3,31	3,45	3,45
250	14			3,60	3,60
260	14			3,74	3,74
270	14			3,88	3,88
300	14				4,49

Na voljo pocinkano jeklo po izdelavi profila (potopljeno, vroče cinkano) ali predhodno cinkanje jeklenega traku – pred izdelavo profila in c-Type

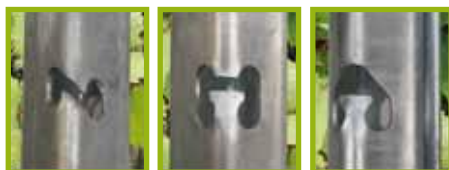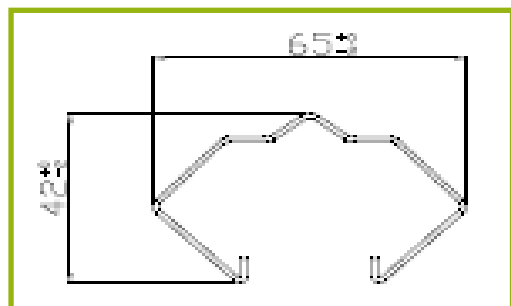

**JEKLO TIPA DD 11 - DIN EN 10111
POCINKANO PO OBDELAVI PROFILA
DIN EN ISO 1461**

	tip	D 65			
	mm	143			
	presek	65x42			
	mm	1,20 + Zn	1,50 + Zn	1,80 + Zn	2,00 + Zn
h cm	reže	kg	kg	kg	kg
180	12	2,57			
200	12	2,85	3,57		
210	14	3,00	3,74		
220	14	3,14	3,92	4,71	
230	14		4,10	4,92	
240	14		4,28	5,13	5,71
250	14		4,46	5,35	5,94
260	14		4,64	5,56	6,18
270	14		4,81	5,78	6,42
280	14		5,00	6,00	6,65
290				6,20	6,90
300				6,42	7,13
325				7,00	7,73


C - TYPE S235 JOW S355 JOW

**POCINKANO PRED IZDELAVO PROFILA DIN EN 10346
JEKLO TIPA S250GD+ZN275 DIN EN 10346**

	tip	D 65			
	mm	143			
	presek	65x42			
	mm	1,20 + Zn	1,50 + Zn	1,80 C-TYPE	2,00 + Zn
h cm	reže	kg	kg	kg	kg
180	12	2,39			
200	12	2,65	3,32		
210	14	2,79	3,48		
220	14	2,92	3,65		
230	14	3,05	3,81	4,58	
240	14		3,98	4,78	5,31
250	14		4,15	4,98	5,53
260	14		4,31	5,17	5,75
270	14		4,48	5,38	5,97
280	14		4,65	5,57	6,19
290				5,77	6,40
300				5,98	6,63
325				6,47	7,19

Na voljo pocinkano jeklo po izdelavi profila (potopljeno, vroče cinkano) ali predhodno cinkanje jeklenega traku – pred izdelavo profila (c-type dimenzij mm 1,50 - 1,80 - 2,00)



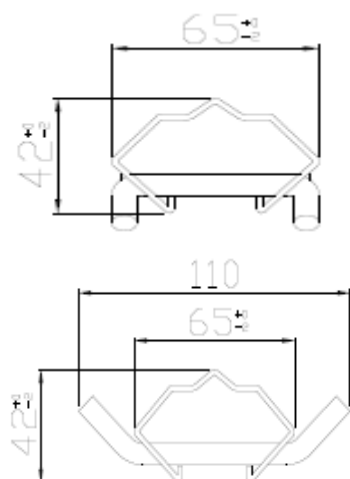


POCINKANO PO OBDELAVI PROFILA
S235JR DIN EN10346 - 1461


širina neobdelanega jekla mm		143 + dodatki		
debelina mm		1,50	1,80	2,00
h cm	št. dodatkov	kg	kg	kg
200		3,98		
220		4,34		
230		4,52	5,35	5,90
250		4,88	5,78	6,38
270		5,24	6,21	6,86
300				7,58
325				8,18



Preddispozicija za napenjalno verigo





Art 12 Ep



Art 82 Std Ep



Art 82 Max Ep

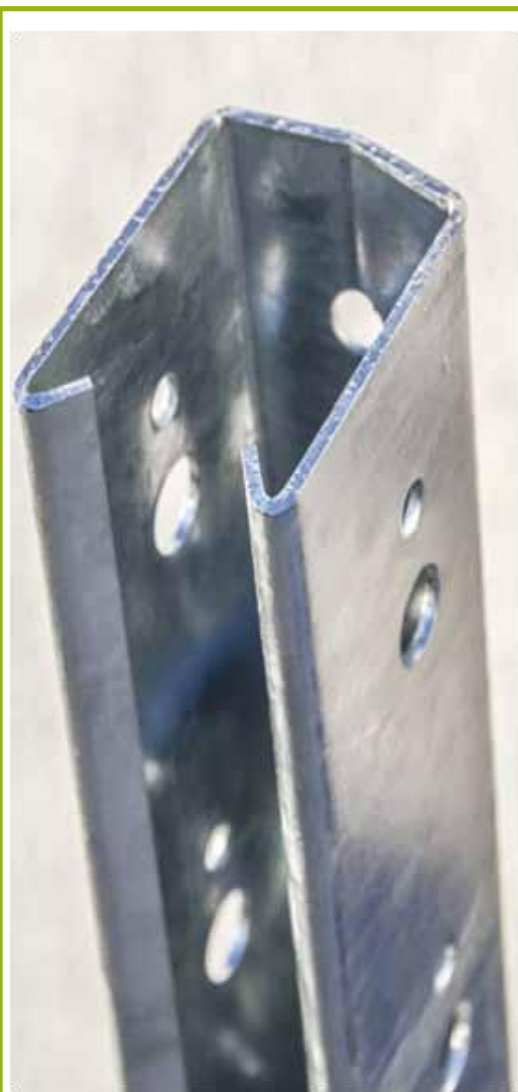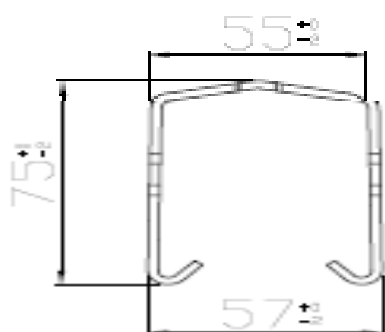

POCINKANO PRED IZDELAVO PROFILA
S250GD+ZN275 DIN-EN 10346

c-type - S235 JOW in S355 EN 10027-1 in ECIS-IC 10

Poc. po obdelavi profila S235JR DIN EN10346 - 1461

tip	predh.cink. / c-typ		cink. po obdelavi	
širina neobd. jekla	mm 212		mm 212	
debelina	2,00	2,50	2,20	2,70
h cm	kg /kos		kg /kos	
240	7,99	9,99	8,60	10,74
250	8,32	10,40	8,95	11,18
260	8,65	10,82	9,30	11,63
270	8,99	11,23	9,66	12,08
280	9,32	11,65	10,02	12,52
290	9,65	12,07	10,38	12,97
300	9,99	12,48	10,73	13,42
325	10,82	13,52	11,63	14,54
350	11,65	14,56	12,52	15,65



Art 82 e 88



Art Morse



Art 40RBTT-13



Pia EP75

Na voljo pocinkano jeklo po izdelavi profila (potopljeno, vroče cinkano) ali predhodno cinkanje jeklenega traku – pred izdelavo profila (c-type dimenzij mm 1,50 - 1,80 - 2,50)

Stebri za ograje



MEDNARODNI PREHOD 2, VRTOJBA
5290 ŠEMPETER PRI GORICI
hitmacdo@gmail.com
00386 (5) 7300 698
00386 (0)41 255 629



CORSO ITALIA 17 c/o De.Mo.Dati S.r.l.
34170 GORIZIA (IT)
goimpex.agri@gmail.com
00386 (0)40 620 618
0039 048134155